




Air You Can Trust™

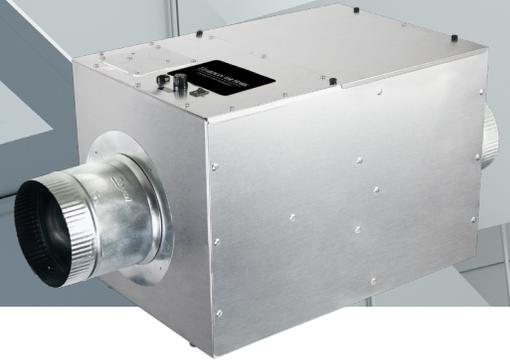

Features ActivePure® Technology, proven to reduce up to 99.9% of many common types of bacteria, viruses, and mold¹

THE TECHNOLOGY

The Aerus Guardian Air Home combines multiple complementary technologies, including ActivePure Technology, a pre-filter, HEPA, and activated carbon. Patented ActivePure Technology is an advanced air purification technology. It has been proven to reduce up to 99.9% of many common airborne and surface contaminants (list of tested pathogens can be found in “The Proof” section below).

ActivePure Technology does not replace the need to follow public health guidelines and should be used as complementary technology.

THE PROOF

In extensive unaffiliated lab testing, ActivePure® Technology has been proven to significantly reduce the following contaminants and pathogens¹:

- SARS-CoV-2
- *Staphylococcus Aureus*
- *Aspergillus niger* endospores
- H1N1 Influenza
- H5N8 Influenza
- MRSA
- *Bacillus globigii*
- MS2 Bacteriophage
- *Staphylococcus epidermidis*
- PhiX-174
- *Erwinia Herbicola*
- *Listeria monocytogenes*
- Murine Norovirus
- *E. coli*
- *Candida auris*
- *Botrytis cinerea*
- *Sclerotinia sclerotiorum*
- *Legionella pneumophila*
- *Aspergillus versicolor*
- *Clostridium difficile*
- *Salmonella enterica*

THE BENEFITS

The Aerus Guardian Air Home provides air purification and surface decontamination without the use of ozone. It is a proactive and effective solution for your home or business.

- Uses ActivePure Technology, proven to reduce up to 99.9% of many common types of bacteria, viruses and mold in indoor air and surfaces¹
- A 4-stage filtration process is used to create a very effective filtration system
- Reduces VOC gases, smoke and odors in the air without the use of ozone¹
- Protects heating and cooling system from potential buildup



Inducted into the 2017 Space Technology Hall of Fame by the Space Foundation

Assembled in USA



¹View test results at Aerusonline.com/Scientific-Proof



GUARDIAN AIR HOME



Product Information	00700; Model F193B Meets California ozone emissions limit. CARB Certified. Validated to UL 2998
Technology Included	ActivePure® Technology – (1) 9” Cell HEPA Filter Pre-Filter
Electrical	Supply Voltage: 120 VAC Power Consumption: 1.45 Amps; 96 Watts
Mechanical	Air Flow: 300 CFM Air Intake Collar: 6” round Air Outtake Collar: 6” round
Safety	Conforms to UL 867
Weight & Dimensions	14.35 lbs (6.5 kg) 13.5” W x 13.5” H x 19.5” D (34 cm x 34 cm x 50 cm)
Operating Temperature	(Return Air) 30°F - 95°F (-1°C - 35°C)
Coverage¹	Up to 3,000 sq. ft. (278 m ²) depending on occupant density and other factors. High density commercial not to exceed 1,500 sq. ft. (139 m ²).
Warranty	Limited 5 year warranty



Contact Name: _____



Email: _____



Phone Number: _____

1. Recommended ceiling height to not exceed 10 ft. Solutions should be customized based upon a variety of factors including HVAC system capabilities and settings, air flows taking into account walls, air pressure, and doors, ambient air temperatures and humidities, variable density, known VOC concentrations, and other layers of protection.